
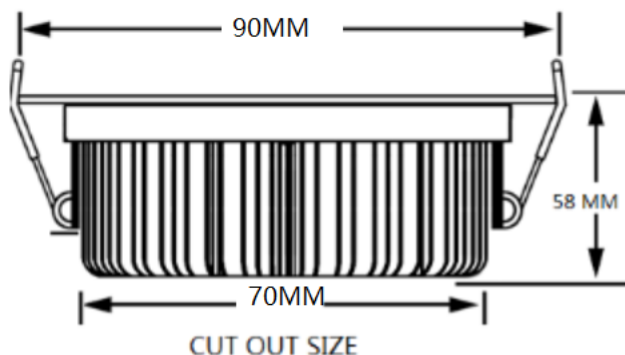


LED DOWNLIGHT

(Cut out 75MM/90MM/115MM/155MM/200MM)

These general purpose LED light fitting is designed with robust polycarbonate fitting for the budget cost. The fitting is suitable for a range of home lighting or commercial applications. The fitting is also dimmable to give even further flexibility in the lighting control

Product Code	Voltage (V)	Wattage (W)	Cut out	Luminous Flux (Lm)	IP Rating	CRI	Colour temp	Dimmable
B0104-01-2.5F	240V	8W	75MM	670LMS	IP40	>90	3000/4000/6000K	YES
B0104-01	240V	10W	90MM	900LMS	IP40	>90	3000/4000/6000K	YES
B0104-01-4F	240V	15W	115MM	1350LMS	IP40	>90	3000/4000/6000K	YES
B0104-01-6F	240V	21W	155MM	1650LMS	IP40	>90	3000/4000/6000K	YES
B0104-01-8F	240V	26W	200MM	2050LMS	IP40	>90	3000/4000/6000K	OPTIONAL

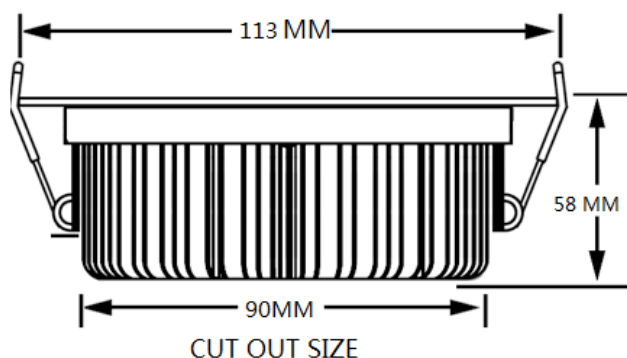

Standard: AUS/NZ 60598.2.2

Approval Number: GMA-501857 (JAS-NZ)

Warranty: 24 months swap over

BEAM ANGLE 120 DEG			
Distance (M)	Avg/Max (lux)	Diameter (M)	
1	84	3.39	
1.5	37	5.09	
2	21	6.79	
2.5	14	8.48	
3	9	10.18	