

SLIM DIMMABLE DOWNLIGHT

LOW PROFILE



LED SLIM DOWNLIGHT

Lumen output	85lm/w (6000K)
Colour Render Index	80
Beam Angle	120°
Colour Temp:	3000K/4000//6000K

Product Specifications

Electrical Supply


Voltage Supply	240-265V
Frequency	50-60Hz
Supply Current	0.0625A
Power Factor	0.92
Input Power	12W (135MM)/14W(150MM)/18W(195KMM)
Output Voltage	
Output Current	N/A
LED Lamp	SMD
Dimmable	OPTIONAL
IP Rating	20
Cable	0.6M Flex&Plug

Physical

Fascia Colour	White
Heatsink	Aluminum
Diffuser	PC
Cutout	135MM/150MM/195MM
Gimbal	N/A
Body	Aluminum
G.W : 0.8 kgs	N.W : 0.35 kgs
Trim Colour	White
Ambient Temp	-30° - 50°
Max. Surface Temp	50°
Warranty	2 Years

Outsider diameter (mm) 170mm (14W) 220mm (18W)

Part No:	Cut out
BTD09W4FCC	135MM
BTD09W5FCC	150MM
BTD09W6FCC	195MM

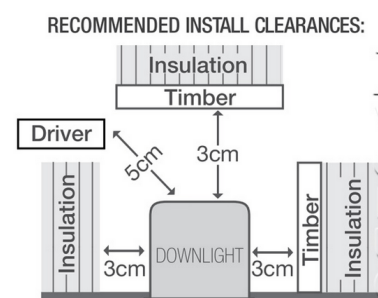

Must be installed by qualified electrician/contractors