

LED HIGH BAY

A high performance open or enclosed highbay designed to perform in the harshest environments

Specification

- Heavy duty die cast aluminium housing
- Easy to install and maintain
- Designed for safety and durability
- Reflector by a clamp band
- Reliable ingress protection
- Attractive outlook with a tangible product quality
- 1.2M Flex and AU plug
- Suitable for mounting heights of 5m and above



Product details

Model/Part BGK01 150W / BGK01-200W

Optical

Frame colour	Luminous	CCT	Emitting Angle	CRI
Silver	90LM/W	(5000K-6000K)	45°/120°	75

Mechanical Dimension

IP Rating	Net Weight	Dimensions
IP20	4.55kg	420x651.9x290mm

Electrical

Input Voltage	Power Consumption	Power Factor
85-295V 50-60Hz	150W±10% OR 200W±10%	0.95

Operating Conditions


Operating Ambient Temperature
-30°C to +70°

Quick Specification

Pierlite heavy Duty die cast aluminium, reactor ignitor control gear.

Design Application

Warehouses, stores, factories, adverse environments and industrial sites.

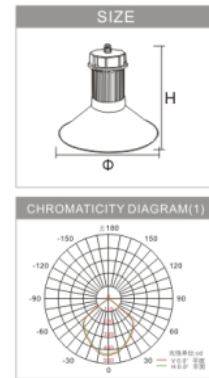

UP TO 80% ENERGY SAVING

